



Gold

Silver

LED Curing lìght

Model:BL-405

Feature

New Al-alloy shell

High energy penetration rate glass fiber rod

- 5W big power LED, high Light intensity, long use life.

Extra big capacity Li-ion battery

 Sleep screensaver function, save power Automatic shutdown, low battery alarm

Available for all brands resin materials.

Touch pad type button, convenient operation.

Digital display, It's easy to see working time.

Technical data

AC110-220V 50Hz/60Hz Charging input voltage:

 Battery voltage : DC3.7-4.2V 2200mAh Battery capacity: 420-480nm – Wave length :

1200-1500mW/cm – Light intensity: Package size : (mm) $215 \times 145 \times 65$

Weight: (kg)

Standard equipment:

– User's manual

Charger Mainframe Light guide Light-shading shim – Adapter







White Black

- LEDCuring light

Model:BL-406

Functions:

Type: wireless

3 modes: strong, gradually strong, flash

Time setting: 10s, 15s, 20s, 25s, 30s, 35s, 40s

Whitening

Measurable and dimmable light intensity

Built in cooling fan, overheating avoidance

 Stable power output, not affect the curing effect due to the battery drop

 High capacity Li-on battery, one-time full charge, working time 10s each time, can be used continuously

for more than 300 times Low battery alert

Ultra low standby power consumption, long standby time

Technical data:

AC110-220V 50Hz/60Hz Charging input: Charging cradle input: DC5V 1A DC4.2V 0.5A Battery output: DC3.7V Battery voltage: 4400mAh Battery capacity:

420-480nm Wave length: 1500mW/cm² Light intensity: Packing (mm) $170 \times 205 \times 100$

Weight (kg) 0.615

Standard equipment:

– Charger cradle	1pcs
Main unit	1pcs
 Light guide 	1pcs
 Filter cover 	1pcs
 Whitening head 	1pcs
 Power adapter 	1pcs
– Manual	1pcs



Blue Silver Black Green Red

LED Curing lìght

Model:BL-402

Feature:

Environmental protection grade plastic shell

5W big power LED

High energy penetration rate glass fiber rod

Big capaciry Li-ion battery

 Sleep screensaver function, save power Automatic shutdown, low battery alarm

Silicone button , nice hand feeling

– Strong , gradually strong , flashing three types working mode. - Digital display, It's easy to see working time.

Available for all brands resin materials.

Technical data

– Charging input voltage: AC110-220V 50Hz/60Hz

DC3.7-4.2V Battery voltage : 2200mAh Battery capacity: 420-480nm – Wave length : 800-1000mW/cm Light intensity: $210 \times 145 \times 68$ Package size : (mm) Weight: (kg)

Standard equipment:

Charger Mainframe Light guide Light-shading shim Adapter – User's manual



Blue Silver Black Green Red

LED Curing lìght

Model:BL-402A

Feature:

Environmental protection grade plastic shell

5W big power LED

- High energy penetration rate glass fiber rod

Big capacity Li-ion battery

Sleep screensaver function, save power

Automatic shutdown, low battery alarm

 Silicone button ,nice hand feeling - Strong , gradually strong , flashing three types working mode.

Digital display , It's easy to see working time.

Available for all brands resin materials.

Technical data

AC110-220V 50Hz/60Hz Charging input voltage:

 Battery voltage : DC3.7-4.2V 2200mAh Battery capacity: 420-480nm – Wave length : 800-1000mW/cm – Light intensity:

Package size : (mm) $210 \times 145 \times 68$

Weight: (kg) 0.4

Standard equipment:

, ,	
Charger	1pcs
 Mainframe 	1pcs
 Light guide 	1pcs
 Light-shading shim 	1pcs
Adapter	1pcs
User's manual	1pcs





LED Curing lìght

Model:BL-401B (Built in)

Feature:

- New Al-alloy shell
- High energy penetration rate glass fiber rod
- 5W big power LED, high Light intensity, long use life.
- Extra big capacity Li-ion battery
- Sleep screensaver function, save power Automatic shutdown, low battery alarm
- Touch pad type button, convenient operation.
- Digital display, It's easy to see working time.
- Available for all brands resin materials.

Technical data

 Charging input voltage: AC110-220V 50Hz/60Hz


2200mAh Battery capacity:

420-480nm – Wave length :

1200-1500mW/cm Light intensity:

Selective Color:





Battery voltage : DC3.7-4.2V

Package size : (mm) $215 \times 145 \times 65$

- Weight: (kg)



Model:BL-404



- Enviromental protection grade plastic shell
- 5W big power LED
- High energy penetration rate glass fiber rod
- Big capaciry Li-ion battery
- Sleep screensaver function, save power Automatic shutdown, low battery alarm
- Silicone button , nice hand feeling
- Strong , gradually strong , flashing three types working mode.
- Digital display, It's easy to see working time.
- Available for all brands resin materials.

Technical data

– Charging input voltage: AC110-220V 50Hz/60Hz

DC4.2V Battery voltage : 2000mAh Battery capacity:

420-480nm – Wave length :

1200-1500mW/cm Light intensity: $245 \times 164 \times 102$

Package size : (mm) Weight: (kg)

Standard equipment: Charger Mainframe Light guide Light-shading shim Adapter – User's manual




Selective Color:









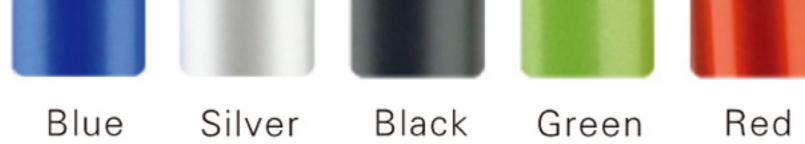



LED Curing lìght

Model:BL-403

Feature:

- New Al-alloy shell
- High energy penetration rate glass fiber rod
- 5W big power LED, high Light intensity, long use life.
- Extra big capacity Li-ion battery
- Sleep screensaver function, save power
- Automatic shutdown, low battery alarm
- Touch pad type button, convenient operation. - Digital display, It's easy to see working time.
- Available for all brands resin materials.

Technical data

AC110-220V 50Hz/60Hz Charging input voltage: DC3.7-4.2V Battery voltage : 2400mAh Battery capacity: – Wave length : 420-480nm

1000-1200mW/cm – Light intensity:

Package size : (mm) $215 \times 145 \times 65$ Weight: (kg)

Standard equipment:

Charger Mainframe Light guide Light-shading shim Adapter User's manual

LED Curing lìght

Model: BL-407

Feature:

- Environmental protection grade plastic shell
- 5W big power LED
- High energy penetration rate glass fiber rod
- Big capaciry Li-ion battery
- Sleep screensaver function, save power
- Automatic shutdown, low battery alarm Silicone button ,nice hand feeling
- Strong, gradually strong, flashing three types working mode.
- Digital display , It's easy to see working time.
- Available for all brands resin materials.

Technical data

 Charging input voltage: Battery voltage : 2200mAh Battery capacity: 385-515nm – Wave length :

1500m W/cm – Light intensity: Package size : (mm) $210 \times 145 \times 68$

Weight: (kg) 0.4

Standard equipment:

Charger	1pc
 Mainframe 	1pc
 Light guide 	1pc
 Light-shading shim 	1pc
Adapter	1pc
User's manual	1pc



